
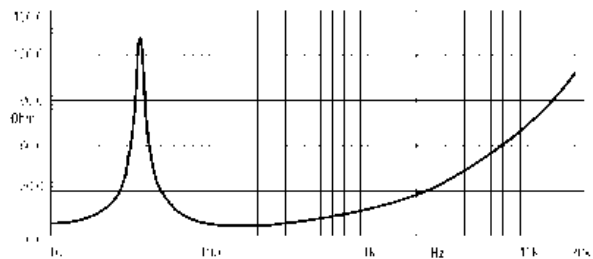


- 98 dB SPL 1W / 1m average sensitivity
- 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
- 1000 WAES power handling
- Double Silicon Spider (DSS) for improved excursion control and linearity
- Weather protected cone and plates for outdoor usage
- Improved heat dissipation via unique basket design and backplate vents
- Suitable for high SPL subwoofer design

The 18LW1251 is the updated version of the 18LW1250, an 18 inch (460 mm) high performance extended low frequency transducer. It has been designed for use as a low bass or sub-woofer component, in either a reflex, bandpass or horn loaded configuration, in high power loudspeaker systems. The 18LW1251 design has evolved from extensive research carried out at our own R&D and Engineering facilities. It provides clean, undistorted low frequency reproduction at very high levels and is able to withstand high power without damage. The transducer design features include a large displacement suspension system which in conjunction with a high quality cone and the Eighteen Sound Double Silicon Spider (DSS), assure a very linear piston action and provide full control across the entire working range. This is further improved by a inside outside copper voice coil, based on our Interleaved Sandwich Voice coil (ISV) technology. This provides high levels of thermal stability and durability. The ISV technology is based on a high strength fibreglas former with half the coil wound on the outside and half on the inside, bonded together using unique high temperature resin adhesives. The result is a balanced linear motor exerting a very high force factor. Excellent heat dissipation is derived from a basket design which incorporates air channels between the basket and the magnetic top plate. In addition, eight air vents in the back plate, aligned with the voice coil, force the air into the lower part of the gap. Maximum flux density in the gap is assured by the special top and back plate design, resulting in a high BL factor. Due to the increasing use of audio systems at outdoor events, the ability to perform in adverse weather conditions or in areas of high humidity is a key feature of the 18LW1251. This has been achieved using exclusive cone treatment and magnetic plate processes which increase resistance to corrosion and render the cone water repellent.

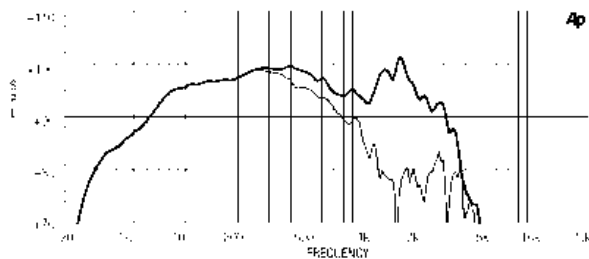

SPECIFICATIONS

| | |
|--|-----------------|
| Nominal Diameter | 460 mm (in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 6.4 Ω |
| Nominal Power Handling ¹ | 1000 W |
| Continuous Power Handling ² | 1400 W |
| Sensitivity ³ | 98.0 dB |
| Frequency Range | 35 - 3500 Hz |
| Voice Coil Diameter | 100 mm (4.0 in) |

DESIGN

| | |
|-----------------------|---|
| Surround Shape | M-roll |
| Cone Shape | Curvilinear |
| Magnet Material | Ferrite |
| Spider | Double Silicon Spider |
| Woofer Cone Treatment | Weather protected |
| Recommended Enclosure | 230.0 dm ³ (8.12 ft ³) |
| Recommended Tuning | 40 Hz |

PARAMETERS⁴

| | |
|---------------------|--|
| Resonance Frequency | 35 Hz |
| Re | 5.0 Ω |
| Qes | 0.28 |
| Qms | 8.0 |
| Qts | 0.27 |
| Vas | 268.0 dm ³ (ft ³) |
| Sd | 1134.0 cm ² (175.77 in ²) |
| Xmax | 9.0 mm |
| Mms | 142.0 g |
| Bl | 23.6 Txm |
| Le | 2.73 mH |
| EBP | 125 Hz |

MOUNTING AND SHIPPING INFO

| | |
|-----------------------------|---|
| Overall Diameter | 462 mm (in) |
| Bolt Circle Diameter | 438 mm (in) |
| Baffle Cutout Diameter | 416.0 mm (in) |
| Depth | 207 mm (in) |
| Flange and Gasket Thickness | 19 mm (in) |
| Net Weight | 13.0 kg (lb) |
| Shipping Weight | 14.7 kg (lb) |
| Shipping Box | 482 x 482 x 257 mm (19 x 19 x 10,1 in) mm (in) |

SERVICE KIT

0271881250

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.