

- 98 dB LF / 107 dB HF SPL 1W/1m average sensitivity
- 800W LF - 140W HF program power handling
- Single magnet neodymium motor
- 75 mm (3") Interleaved Sandwich LF Voice coil (ISV)
- Aluminum Demodulating Ring (SDR) for minimum LF distortion
- 60 mm (2.4") HF Titanium diaphragm
- Edge-wound Aluminum ribbon HF voice coil (EWAL)
- HF copper sleeve for reduced distortion and higher output
- 80 degrees nominal conical dispersion
- Suitable for very compact enclosures and stage monitors

The 15NCX750 is a 15" diameter neodymium coaxial transducer designed for use in compact reflex enclosures and stage monitors as small as 80 lt with a nominal dispersion of 80 degrees.

The curvilinear profile LF cone provides smooth response within its intended frequency range thanks to its high damping pulp composition.

The 75 mm (3 in) LF copper voice coil employs our Interleaved Sandwich Voice coil (ISV) technology, in which a high strength former carries windings on both the outer and inner surfaces. This results in a balanced coil with a uniform distribution of mass and motive energy and an extremely linear motor assembly.

The low distortion and sound quality are further improved by an aluminum demodulating ring (SDR technology) that flatten LF impedance and phase with a constant power transfer. Equipped with proprietary hybrid radial tangerine phase plug 3P architecture, the integrated HF compression driver has been designed to give smooth coherent wavefront in the horn entrance in all working frequency range and high level manufacturing consistency. The phase plug with its short openings and high flare rate value assures low distortion and remarkable improvements in mid-high frequency reproduction. A copper ring on the pole piece reduces the inductance figure of frequencies above 10 kHz, improving phase and impedance linearisation.



The 2.4" diameter HF diaphragm assembly uses a high strength, high temperature treated Nomex voice coil former joined directly to the titanium diaphragm on its upper bend edge, assuring extended frequency energy transfer. This improves linearity and shows unparalleled reliability when compared with a straight former joint.

A specific HF exit profile design has been chosen in order to maximize the cone's profile coupling.

The high force neodymium single magnet structure makes the 15NCX750 a lightweight speaker for its performance class - 5,1 kg (11.24 lb).

The XO15NCX dedicated passive crossover filter is offered, making this coaxial speaker a ready-to-use transducer system.

Due to the widespread use of high power audio systems at outdoor events, the ability to perform in adverse weather conditions is an additional key feature of the 15NCX750. This has been achieved using exclusive cone and magnet plate treatment processes which increase resistance against corrosion and make the cone water repellent.

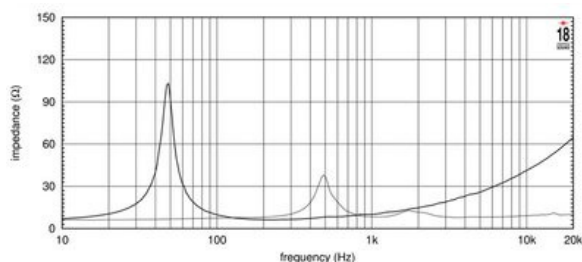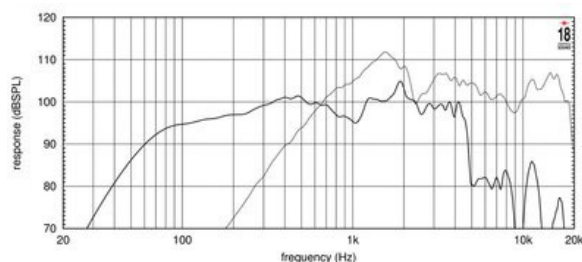



# 15NCX750 8Ω

Coaxiales - 15.0 Inches

## ESPECIFICACIÓN

Diámetro nominal	380 mm (14.96 in)
Impedancia nominal	8 Ω
Impedancia mínima LF	6.3 Ω
Rango de frecuencia	55 - 4500 Hz
Ángulo de dispersión	80 °
Tratamiento del cono del woofer	Water repellent
Material del imán	Neodymium

## ESPECIFICACIONES UNIDAD HF

Sensibilidad de HF	107.5 dB
Manejo de potencia nominal de HF	70 W
Manejo de potencia continua de HF	140 W
Diámetro de la bobina de HF	64 mm (2.5 in)
Material de la bobina de HF	Edge wound Aluminum
Material del diafragma	Titanium
Cruce recomendado	1.2 kHz

## INFORMACIÓN DE MONTAJE Y ENVÍO

Diámetro total	393 mm (15.47 in)
Diámetro de circunferencia de los tornillos	371 mm (14.61 in)
Diámetro de la perforación en el baffle	360 mm (14.17 in)
Profundidad	185 mm (7.28 in)
Espesor del reborde y junta	14 mm (0.55 in)
Peso neto	4.9 kg (10.8 lb)
Peso del envío	5.9 kg (13.01 lb)
Caja de envío	405 x 405 x 260 mm (15.94x15.94x10.24 in)

## ESPECIFICACIONES UNIDAD LF

Sensibilidad de LF	98.0 dB
Manejo de potencia nominal de LF	400 W
Manejo de potencia continua de LF	800 W
Diámetro de la bobina de LF	75 mm (3.0 in)
Material de la bobina LF	- Copper -

## PARÁMETROS

Frecuencia de resonancia	49 Hz
Re	5.4 Ω
Qes	0.4
Qms	6.32
Qts	0.37
Vas	141.0 dm <sup>3</sup> (4.98 ft <sup>3</sup> )
Sd	881.0 cm <sup>2</sup> (136.56 in <sup>2</sup> )
η <sub>o</sub>	4.5 %
X <sub>max</sub>	5.5 mm
M <sub>ms</sub>	81.0 g
Bl	18.4 Txm
Le	0.66 mH
EBP	122 Hz

## CRUCE DE ALTAVOZ

Impedancia Nominal	8.0 Ω
Pendiente de paso bajo	24.0 dB/oct
Pendiente de paso alto	12.0 dB/oct