
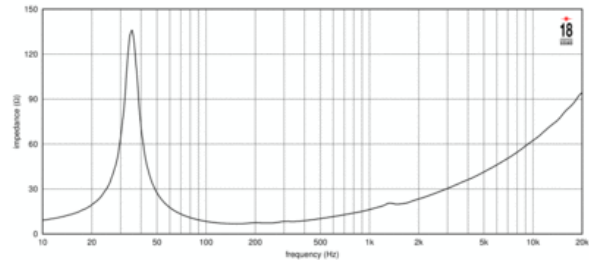


- 115mm (4.5in) Interleaved Sandwich Voice coil (ISV)
- Weather protected cone and plates
- Great heat dissipation capability
- Ultra linear suspension system
- Neo motor for high power and very efficient thermal exchange
- Single demodulating ring (SDR) for distortion reduction and maximum SPL

The 15NLW4500 is a 15" extended low frequency loudspeaker, designed for use in vented, bandpass or even horn loaded enclosures. The loudspeaker is designed to withstand high power levels without damage while providing clean and undistorted LF reproduction at a very high SPL. For optimum results we recommend amplifiers able to deliver 3000 Watt program power. The 15NLW4500 features a unique motor featuring a high grade Neo magnet assembly in a structure optimized for thermal and magnetic efficiency. 15NLW4500 features include a large displacement suspension system which, in conjunction with a composite reinforced, straight ribbed cone and the Eighteen Sound proprietary SDR technology, allows an undistorted ultra-linear piston action and provides full mechanical control across the entire working range. The 115mm (4.5 in) state-of-the-art voice-coil utilizing Interleaved Sandwich Voice coil (ISV) technology, provides high levels of thermal stability and durability. The ISV technology achieves a balanced linear motor unit exerting an exceptionally high force factor.

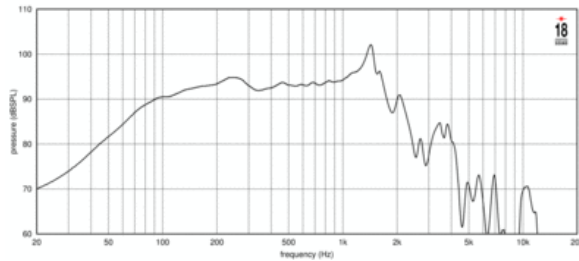

### SPECIFICATIONS

Nominal Impedance	8 Ω
Minimum Impedance	6.7 Ω
Nominal Power Handling <sup>1</sup>	1500 W
Continuous Power Handling <sup>2</sup>	3000 W
Sensitivity <sup>3</sup>	96.3 dB
Frequency Range	40 - 1000 Hz
Voice Coil Diameter	115 mm (4.53 in)

### DESIGN

Surround Shape	Triple roll
Cone Shape	Straight
Magnet Material	Neo
Woofer Cone Treatment	Weather protected
Recommended Enclosure	50.0 dm <sup>3</sup> (1.77 ft <sup>3</sup> )
Recommended Tuning	45 Hz

### PARAMETERS<sup>4</sup>

Resonance Frequency	35 Hz
Re	5.4 Ω
Qes	0.27
Qms	7.8
Qts	0.26
Vas	111.0 dm <sup>3</sup> (3.92 ft <sup>3</sup> )
Sd	881.0 cm <sup>2</sup> (136.56 in <sup>2</sup> )
η <sub>o</sub>	1.7 %
X <sub>max</sub>	14.5 mm
X <sub>var</sub>	12.0 mm
M <sub>ms</sub>	201.0 g
Bl	29.7 T·xm
Le	1.62 mH
EBP	129 Hz

### MOUNTING AND SHIPPING INFO

Overall Diameter	393 mm (15.47 in)
Bolt Circle Diameter	371 mm (14.61 in)
Baffle Cutout Diameter	356.0 mm (14.02 in)
Depth	199 mm (7.83 in)
Flange and Gasket Thickness	15 mm (0.61 in)
Net Weight	11.4 kg (25.13 lb)
Shipping Weight	12.6 kg (27.78 lb)

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.