



- 97 dB SPL 1W / 1m average sensitivity
- 44 mm (1 3/4 in) aluminum voice coil
- 200 WAES power handling
- External neodymium magnet assembly
- Single Demodulating Ring (SDR) for lower distortion
- Weather protected cone and plates for outdoor usage
- Improved heat dissipation via Active Cooling System
- Specially designed for line arrays and compact two way applications

The 6NMB900 is the evolution of the 6NMB420 neodymium midbass speaker. This new 6.5 inch neodymium midbass transducer has been designed for mid low frequency reproduction in system designs where high intelligibility is required. 6NMB900 is suitable as mid-bass in line array systems or multiple way systems with high-pass crossover above 200 Hz and low-pass up to 3kHz; enclosure might be closed or vented with volume size starting from 2 lit.

The speaker offers a superb linearity: distortion values are further minimized by new enhanced design criterias, taking the 6NMB900 to very high level of performance.



The extremely powerful external neodymium magnet assembly assures high flux concentration, low power compression and excellent heat exchange. The levels of force factor and power handling are, as a consequence, at the upper professional level with best power to weight ratio.

A consistent heat transfer is guaranteed by the encapsulation of the magnetic structure in the interior of the basket, offering a large contact space between the back plate and the dissipating structure.

Particular efforts were dedicated to the new surround shape and material design, in order to minimize the resonances on mid range frequencies. The new multiroll design offers a consistent damping to typical bell modes.

The 44 mm voice coil is made of light-weight aluminum wire and assures linearity and high power handling.

The ability to perform in humid environments is a key feature of the 6NMB900: this is achieved through a proprietary humidity repellent cone treatment.

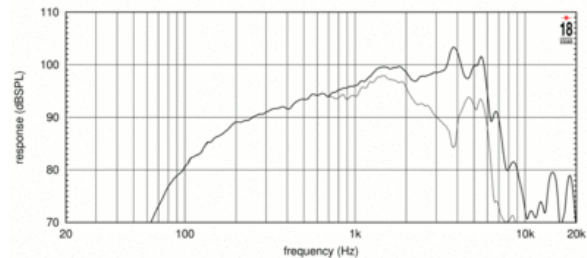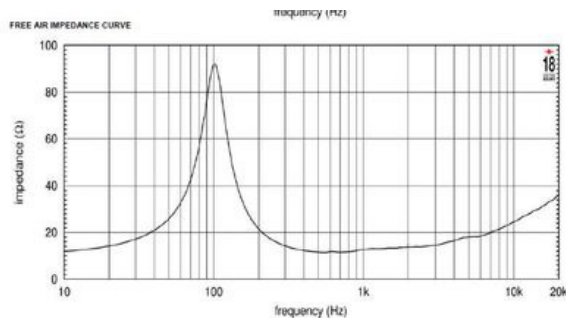

### SPECIFICATIONS

Nominal Diameter	152 mm ( in)
Nominal Impedance	16 Ω
Minimum Impedance	11.5 Ω
Nominal Power Handling <sup>1</sup>	200 W
Continuous Power Handling <sup>2</sup>	260 W
Sensitivity <sup>3</sup>	96.0 dB
Frequency Range	200 - 7000 Hz
Voice Coil Diameter	44 mm (1.73 in)

### DESIGN

Surround Shape	Multiroll
Magnet Material	Neo
Recommended Enclosure	6.0 dm <sup>3</sup> (0.21 ft <sup>3</sup> )
Recommended Tuning	100 Hz

### PARAMETERS<sup>4</sup>

Resonance Frequency	100 Hz
Re	10.1 Ω
Qes	0.38
Qms	3.1
Qts	0.34
Vas	6.65 dm <sup>3</sup> (0.23 ft <sup>3</sup> )
Sd	130.0 cm <sup>2</sup> (20.15 in <sup>2</sup> )
Xmax	3.0 mm
Mms	9.0 g
Bl	12.4 Txm
Le	0.19 mH
EBP	263 Hz

### MOUNTING AND SHIPPING INFO

Overall Diameter	162 mm (6.38 in)
Bolt Circle Diameter	170 mm (6.69 in)
Baffle Cutout Diameter	148.0 mm (5.83 in)
Depth	73 mm (2.87 in)
Flange and Gasket Thickness	11 mm (0.43 in)
Net Weight	1.25 kg (2.76 lb)
Shipping Weight	1.45 kg (3.2 lb)
Shipping Box	185x170x85mm mm (7.28x6.69x3.35 in)

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.