



15NCX910N 8Ω

Coaxiales - 15.0 Inches



- 99.5 dB LF / 109 dB HF SPL 1W/1m average sensitivity
- 900W LF - 240W HF maximum program power handling
- Single magnet neodymium motor
- 75 mm (3") Interleaved Sandwich LF Voice coil (ISV)
- Aluminum Demodulating Ring (SDR) for minimum LF distortion
- 75 mm (3") HF TPM Nitride coat titanium
- Edge-wound Aluminum HF voice coil (EWAL)
- HF copper sleeve for reduced distortion and higher output
- 80 degrees nominal conical dispersion
- Suitable for very compact enclosures and highest quality stage monitors



15NCX910N 8Ω

Coaxiales - 15.0 Inches

The 15NCX910N is a 15" diameter neodymium coaxial transducer designed for use in compact reflex enclosures and stage monitors as small as 50 lt with a nominal dispersion of 80 degrees equipped with a state of the art Nitride coat titanium dome for the high frequency section.



The curvilinear profile LF cone provides smooth response within its intended frequency range thanks to its high damping pulp composition.

The 75 mm (3 in) LF copper voice coil employs our Interleaved Sandwich Voice coil (ISV) technology, in which a high strength former carries windings on both the outer and inner surfaces. This results in a balanced coil with a uniform distribution of mass and motive energy and an extremely linear motor assembly.

The low distortion and sound quality are further improved by an aluminum demodulating ring (SDR technology) that flatten LF impedance and phase with a constant power transfer. Equipped with proprietary architecture, the integrated HF compression driver has been designed to give smooth coherent wavefront in the horn entrance in all working frequency range and high level manufacturing consistency, assuring low distortion and remarkable improvements in mid-high frequency reproduction. A copper ring on the pole piece reduces the inductance figure of frequencies above 10 kHz, improving phase and impedance linearisation.

The 3" diameter pure titanium diaphragm assembly, treated with the 18sound proprietary Nitride coat is increasing the stiffness of titanium reducing drastically resonances and distortion.

A specific HF exit profile design has been chosen in order to maximize the cone's profile coupling. Due to the widespread use of high power audio systems at outdoor events, the ability to perform in adverse weather conditions is an additional key feature of the 15NCX910N. This has been achieved using exclusive cone and magnet plate treatment processes which increase resistance against corrosion and make the cone water repellent.

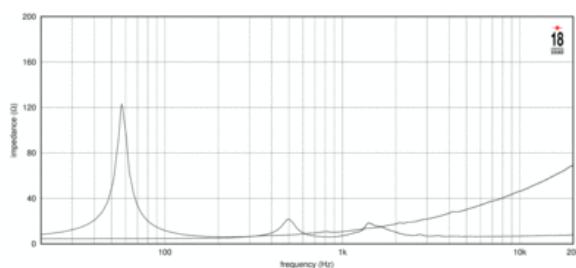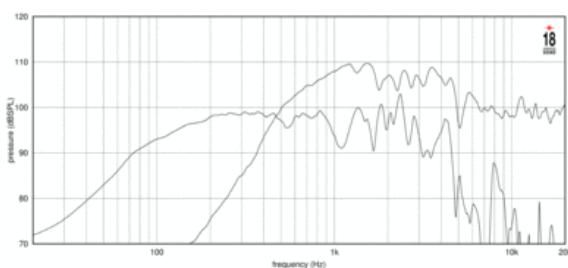

**15NCX910N 8Ω****Coaxiales - 15.0 Inches****ESPECIFICACIÓN**

Diámetro nominal	380 mm (15.0 in)
Impedancia nominal	8 Ω
Impedancia mínima LF	6.5 Ω
Rango de frecuencia	50 - 4000 Hz
Ángulo de dispersión	80 °

ESPECIFICACIONES UNIDAD LF

Sensibilidad de LF	99.5 dB
Manejo de potencia nominal de LF	450 W
Manejo de potencia continua de LF	900 W
Diámetro de la bobina de LF	75 mm (3.0 in)

ESPECIFICACIONES UNIDAD HF

Sensibilidad de HF	109.0 dB
Manejo de potencia nominal de HF	120 W
Manejo de potencia continua de HF	240 W
Diámetro de la bobina de HF	75 mm (3.0 in)
Material de la bobina de HF	Edge wound Aluminum
Material del diafragma	Titanium
Cruce recomendado	1.2 kHz

PARÁMETROS

Frecuencia de resonancia	55 Hz
Re	5.0 Ω
Qes	0.34
Qms	8.2
Qts	0.33
Vas	107.0 dm ³ (3.78 ft ³)
Sd	881.0 cm ² (136.56 in ²)
η _o	5.0 %
Xmax	7.0 mm
Mms	86.0 g
Bl	21.0 Txm
Le	1.1 mH
EBP	161 Hz

INFORMACIÓN DE MONTAJE Y ENVÍO

Diámetro total	393 mm (15.47 in)
Diámetro de circunferencia de los tornillos	371 mm (14.61 in)
Diámetro de la perforación en el baffle	360 mm (14.17 in)
Profundidad	205 mm (8.07 in)
Espesor del reborde y junta	14 mm (0.55 in)
Peso neto	6.5 kg (14.33 lb)
Peso del envío	7.0 kg (15.43 lb)
Caja de envío	405 x 405 x 260 mm (15.94x15.94x10.24 in)