



FREQUENCY RESPONSE MEASURED WITH 2.83 V INPUT ON AXIS AT 1 METER DISTANCE FROM THROAT OF XR2054C HORN. IMPEDANCE MEASURED ON SAME HORN



FREQUENCY RESPONSE MEASURED WITH 77.5 mV INPUT ON 2 in PLANE WAVE TUBE. IMPEDANCE MEASURED ON SAME PLANE WAVE TUBE

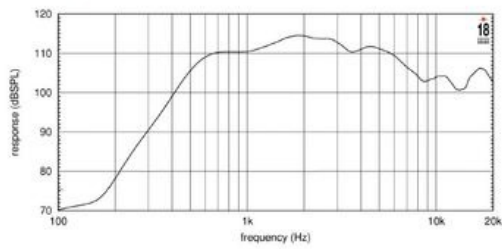

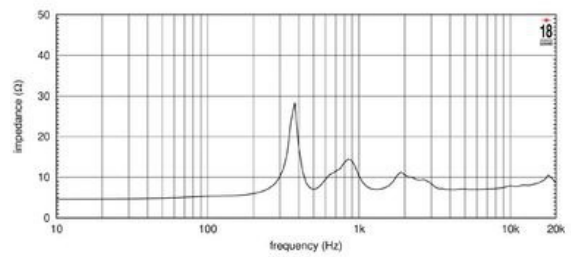

ND4020Ti2 8Ω

Drivers HF - 2.0 Inches

ESPECIFICACIÓN

| | |
|-----------------------------|-----------------|
| Diámetro de la garganta | 51 mm (2.0 in) |
| Impedancia nominal | 8 Ω |
| Impedancia mínima | 6.9 Ω |
| Manejo de potencia nominal | 160 W |
| Manejo de potencia continua | 320 W |
| Sensibilidad | 113.0 dB |
| Rango de frecuencia | 0.6 - 20.0 kHz |
| Cruce recomendado | 0.8 kHz |
| Diámetro de la bobina | 100 mm (4.0 in) |
| Densidad de flujo | 2.0 T |

INFORMACIÓN DE MONTAJE Y ENVÍO

| | |
|----------------|--|
| Diámetro total | 150 mm (5.91 in) |
| Profundidad | 87 mm (3.43 in) |
| Peso neto | 3.4 kg (7.5 lb) |
| Peso del envío | 3.8 kg (8.38 lb) |
| Caja de envío | 215 x 195 x 110 mm (8.46x7.68x4.33 in) |