

**12ND610** 16Ω

Altavoces LF - 12.0 Inches



- 101 dB SPL 1W / 1m average sensitivity
- 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
- 450 W AES power handling
- Neodymium magnet assembly
- Humidity resistant cone
- Suitable for midbass frequency reproduction

The 12ND610 has been specifically designed for use either as a midbass driver in compact 2-way reflex enclosures or as a direct radiating or horn loaded, dedicated midrange driver, in multi-way touring and fixed installation concert and arena systems.

The neodymium magnet assembly assures high flux concentration, low power compression and excellent heat exchange because the external magnet configuration is considerably more efficient than traditional under-pole magnet topology.

Consequently, high levels of force factor and power handling with an optimum power to weight ratio have been achieved.

Direct coupling of the special design basket and magnetic assembly with the large heat sink facilitates thermal flux through the ambient air, increasing the power handling capabilities and lowering the power compression.


The curvilinear paper cone has been created with a special high strength wood pulp designed to achieve the best possible linearity within its intended frequency range and to control bell-mode resonances around the cone circumference. The cone is carried by a multiroll suspension formed from a linen-like material which is more resistant to aging and fatigue than traditional materials.

The 12ND610 implements Interleaved Sandwich Voice coil technology (ISV), in which an aluminum coil is wound inside and outside a high strength fiberglass former, providing a better thermal and mechanical performance than conventional coils.


A proprietary humidity-block cone treatment makes the transducer suitable for outdoor use in adverse weather conditions. In addition, a special coating applied to both the top and back plates makes the 12ND610 far more resistant to the corrosive effects of salts and oxidization.

**12ND610** 16Ω**Altavoces LF - 12.0 Inches**

FREE AIR IMPEDANCE CURVE

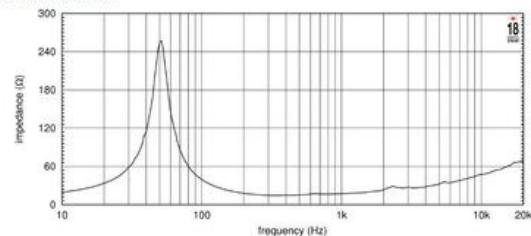

FREQUENCY RESPONSE MADE IN 60 LT. ENCLOSURE TUNED AT 60 Hz IN FREE FIELD (H0) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER, THE THIN LINE REPRESENTS 45° OFF AXIS FREQUENCY RESPONSE.

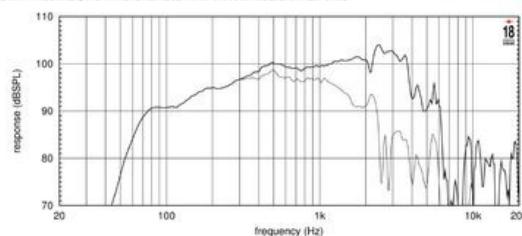

ESPECIFICACIÓN

Diámetro nominal	300 mm (in)
Impedancia nominal	16 Ω
Impedancia mínima	14.5 Ω
Manejo de potencia nominal	450 W
Manejo de potencia continua	700 W
Sensibilidad	101.0 dB
Rango de frecuencia	80 - 5000 Hz
Diámetro de la bobina	75 mm (3.0 in)
Material de la bobina	aluminum

PARÁMETROS

Frecuencia de resonancia	50 Hz
Re	11.9 Ω
Qes	0.22
Qms	4.56
Qt	0.21
Vas	85.0 dm ³ (3.0 ft ³)
Sd	530.0 cm ² (82.15 in ²)
Xmax	3.5 mm
Mms	45.0 g
Bl	27.9 Txm
Le	0.76 mH
EBP	227 Hz

DISEÑO

Recinto recomendado	40.0 dm ³ (1.41 ft ³)
Sintonía recomendada	65 Hz

INFORMACIÓN DE MONTAJE Y ENVÍO

Diámetro total	315 mm (12.4 in)
Diámetro de circunferencia de los tornillos	296 mm (11.65 in)
Diámetro de la perforación en el baffle	282.0 mm (11.1 in)
Profundidad	141 mm (5.55 in)
Espesor del reborde y junta	11 mm (0.43 in)
Peso neto	4.7 kg (10.36 lb)
Peso del envío	5.1 kg (lb)
Caja de envío	332 x 332 x 184 mm (13.07x13.07x7.24 in)