



**10MB777** 8Ω

**Altavoces LF - 10.0 Inches**




- 98 dB SPL 1W / 1m average sensitivity
- 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
- 450 WAES power handling


**Limited distribution - US only**

**Contact [Thunderball Marketing](#) for info**

The 10MB777 mid-bass transducer represents a development of the 10M600 midrange, combining excellent linearity with high efficiency and high power handling capabilities. The 10MB777 is primarily intended for use as a midbass driver in extremely compact 2-way reflex enclosures between 10 and 40 lt. Its curvilinear paper cone is formed using a special high strength wood pulp, designed to achieve the best possible rigidity and stiffness. An exclusive treatment is also applied to the cone to increase its water repellent properties. The 75 mm state-of-the-art voice coil is similar to those fitted to our top-of-the-range 18" and 15" models but it is wound with aluminum wire. The coil also employs our Interleaved Sandwich Voice coil (ISV) technology. A high strength fiberglass former carries windings on both the outer and inner surfaces to achieve a mass balanced coil, resulting in an extremely linear motor assembly with a reduced tendency for eccentric behavior when driven hard. The voice coil cooling is achieved using airways between the chassis back plate and the face plate of the magnet which allow heated air from the voice coil and gap to be channeled away and dissipated by the chassis basket. This technology is a result of 3D CAD resource application by our engineers. The top and back plates of the magnet assembly have been designed to optimise flux density and BL factor in the air gap also using our in-house FEA CAD facility. In addition, a special treatment is applied to the top and back plates making the transducer far more resistant to the corrosive effects of salts and oxidization. Hence, the equipment is able to perform outdoors in inclement weather conditions.

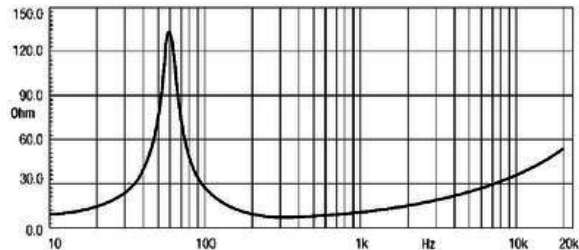

FREQUENCY RESPONSE CURVE

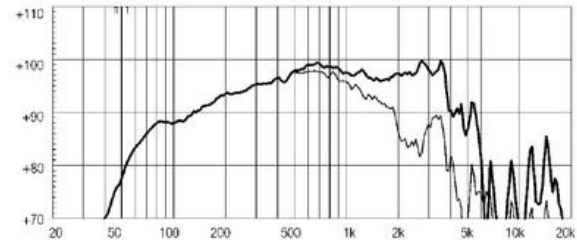

FREQUENCY RESPONSE CURVE OF 10MB600 MADE ON 30 LIT. ENCLOSURE TUNED AT 55HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE FREE AIR IMPEDANCE MAGNITUDE CURVE

## ESPECIFICACIÓN

Diámetro nominal	260 mm ( in)
Impedancia nominal	8 Ω
Manejo de potencia nominal	450 W
Manejo de potencia continua	700 W
Sensibilidad	98.0 dB
Rango de frecuencia	55 - 4500 Hz
Diámetro de la bobina	75 mm (3.0 in)
Material de la bobina	aluminum

## DISEÑO

Recinto recomendado	25.0 dm <sup>3</sup> (0.88 ft <sup>3</sup> )
Sintonía recomendada	65 Hz

## PARÁMETROS

Frecuencia de resonancia	58 Hz
Re	5.7 Ω
Qes	0.23
Qms	5.5
Qts	0.22
Vas	33.4 dm <sup>3</sup> (1.18 ft <sup>3</sup> )
Sd	350.0 cm <sup>2</sup> (54.25 in <sup>2</sup> )
Xmax	6.5 mm
Mms	38.0 g
Bl	18.6 Txm
Le	1.6 mH
EBP	252 Hz

## INFORMACIÓN DE MONTAJE Y ENVÍO

Diámetro total	260 mm (10.24 in)
Diámetro de circunferencia de los tornillos	244 mm (9.61 in)
Diámetro de la perforación en el baffle	232.0 mm (9.13 in)
Profundidad	127 mm (5.0 in)
Espesor del reborde y junta	14 mm (0.55 in)
Peso neto	7.2 kg ( lb)
Peso del envío	7.9 kg (17.42 lb)
Caja de envío	275 x 275 x 164 mm (10.83x10.83x6.46 in)